

MEWS

design Edward Barber & Jay Osgerby

colours

sizes

technical features

packing

MU
TIN
A[®]

MEWS / colours - industrial

chalk

fog

pigeon

lead

ink

soot



MEWS / industrial

design Edward Barber and Jay Osgerby 2013


production industrial

material gres porcellanato ad impasto omogeneo - homogeneous porcelain stoneware

features pezzi tagliati ognuno esattamente uguale all'altro - cut pieces each one exactly the same as the others

thickness 10 mm


*misure nominali - nominal sizes



5,5-39,4 chevron
* 2 1/5"·15 1/2"



5,5-19,6 chevron
* 2 1/5"·7 3/4"




5,5-45
* 2 1/5"·18"




11-11
* 4 1/3"·4 1/3"

complementary pieces



33-45-4,5
* 13"·18"·1 3/4"
gradone - step



33-33-4,5
* 13"·13"·1 3/4"
angolare - corner tile



3,8-45
* 1 1/2"·18"
battiscopa - skirting

MEWS / colours - artisanal

chalk


fog

pigeon

lead

ink

soot

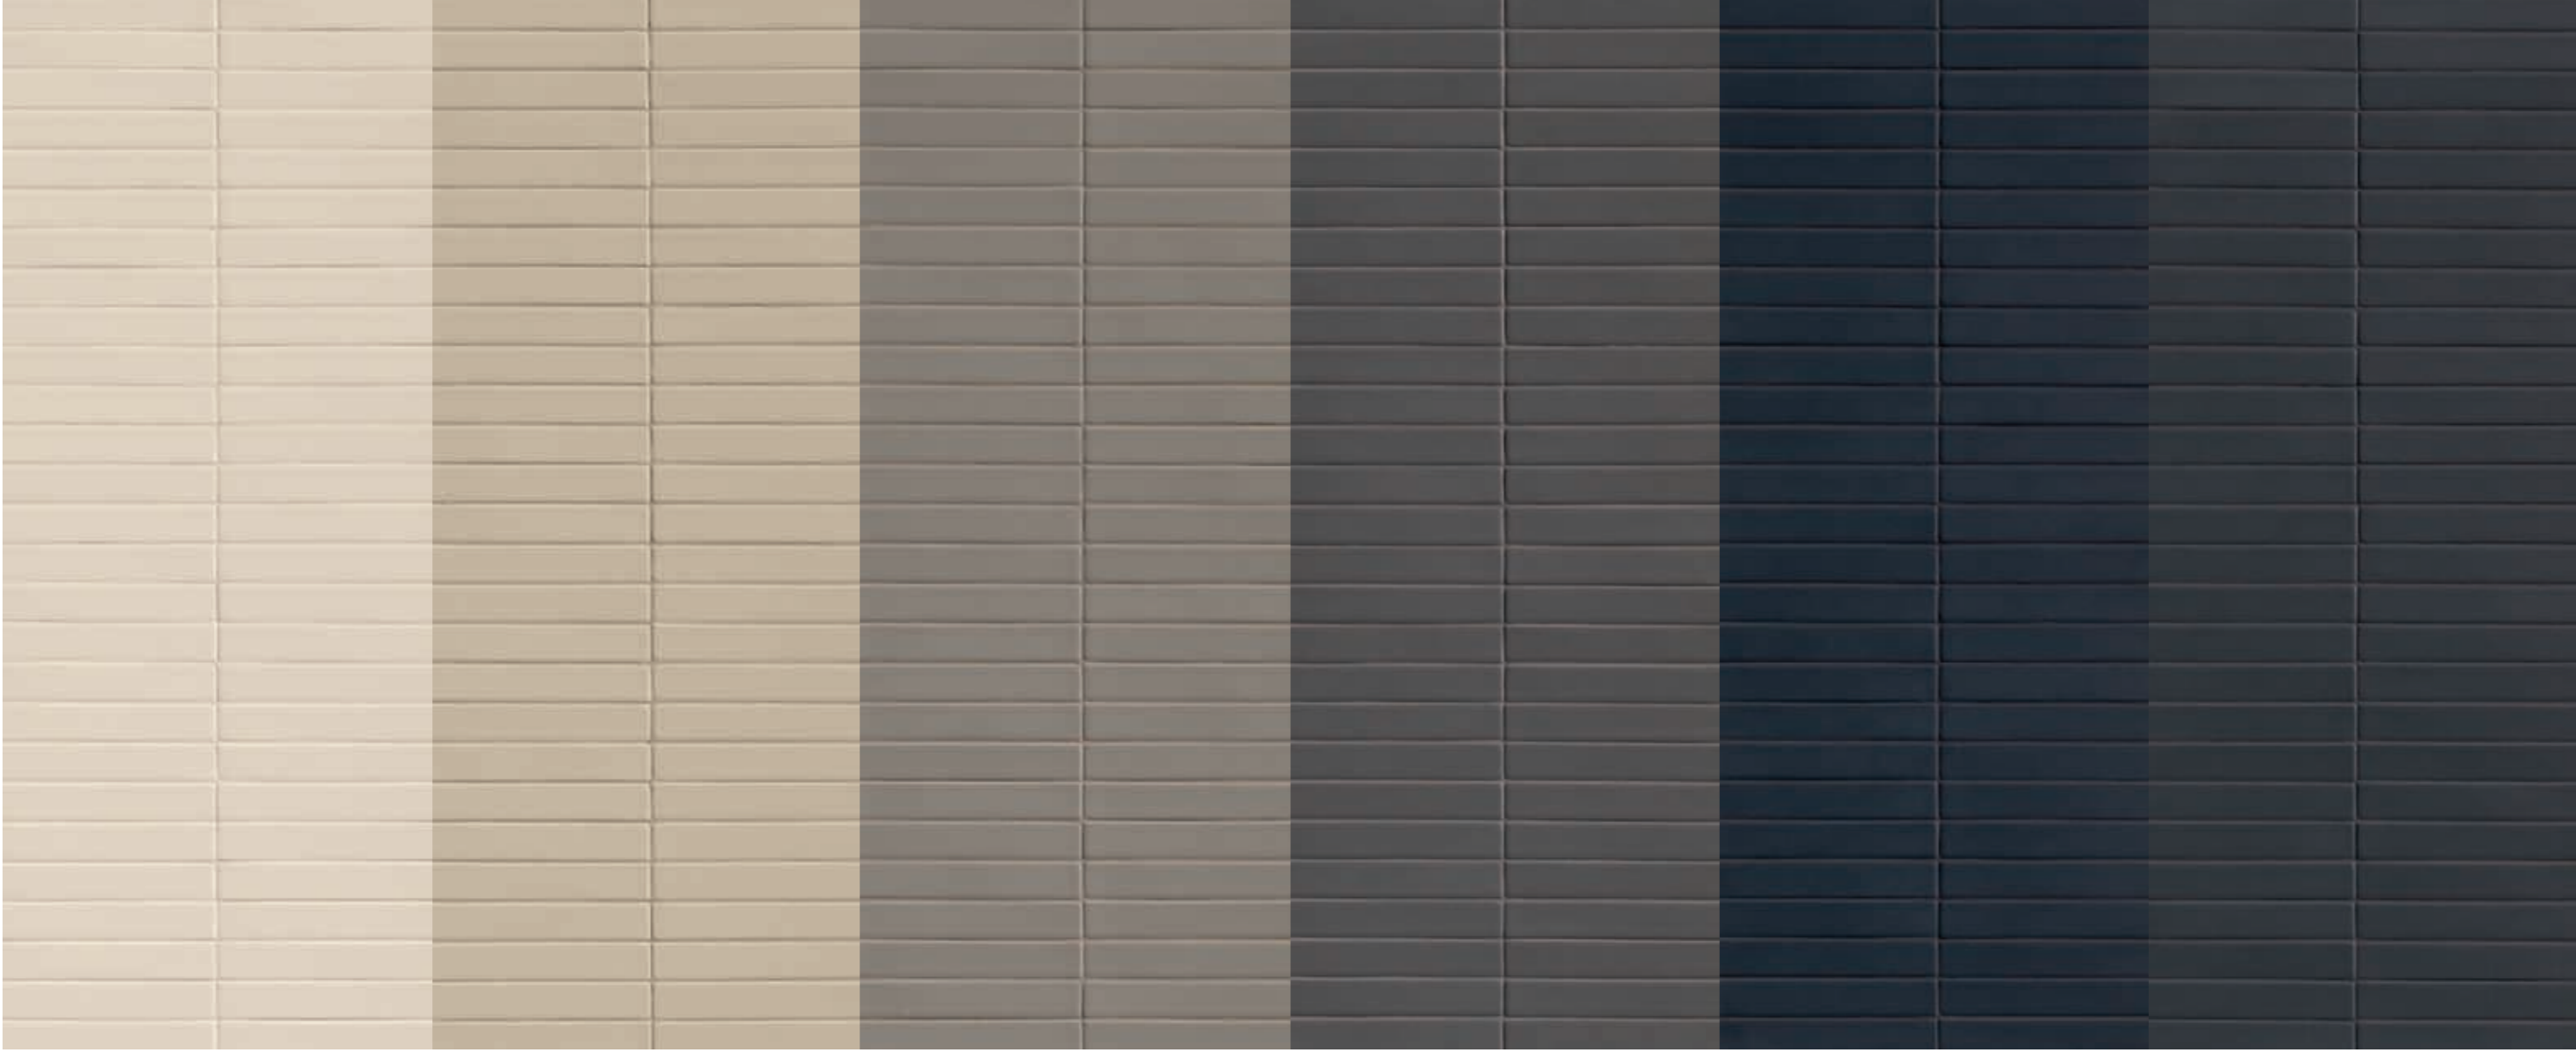

MEWS / artisanal


design Edward Barber and Jay Osgerby 2013

production artisanal

material impasto trafilato smaltato - glazed extruded body

thickness 11 mm


*misure nominali - nominal sizes



artisanal 3,2-20

* 1 1/4" 8"

complementary pieces



1,1-20

* 2/5" 8"

quarter round



1,4-1,4

* 1/2" 1/2"

angolo quarter round

MEWS / technical features

Bla GROUP

norma standard	caratteristiche features	valore prescritto value required	MEWS
ISO 10545/3	assorbimento d'acqua water absorption	<0,5%	0,04%
ASTM C373		<0,5%	0,04%
EN 101	durezza superficiale (scala mohs) surface hardness (scala mohs)	> 5	7
ISO 10545/9	resistenza agli sbalzi termici resistance to thermal shock	nessuna alterazione visibile no visible alteration	resiste resistant
ASTM C484		no samples must show visible defects	unaffected
ISO 10545/12	resistenza al gelo frost resistance	nessuna alterazione visibile no visible alteration	resiste resistant
ASTM C1026		unaffected	unaffected
ISO 10545/13	resistenza agli attacchi chimici resistance to chemical attacks	nessuna alterazione visibile no visible alteration	resiste resistant
ASTM C650			unaffected
BCRA	scivolosità antislip	> 0,40	dry 0,6 wet 0,42
DIN 51130 - 04		valori medi 6° ÷ 10°	R9
ASTM C1028		> 0,60	dry 0,75 wet 0,75

AIII GROUP

norma standard	caratteristiche features	valore prescritto value required	MEWS ARTISANAL
EN 101	durezza superficiale (scala mohs) surface hardness (scala mohs)	> 5	6
ISO 10545/9	resistenza agli sbalzi termici resistance to thermal shock	nessuna alterazione visibile no visible alteration	resiste resistant
ASTM C484		no samples must show visible defects	unaffected
ISO 10545/13	resistenza agli attacchi chimici resistance to chemical attacks	nessuna alterazione visibile no visible alteration	resiste GA - GLA - GHA resistant GA - GLA - GHA
ASTM C650			unaffected
ISO 10545/4	resistenza alla flessione breaking strength	≥12 N/mm2	26,9 N/mm2 in conformity with standard

Leed certification 4.1: from 13,8% to 15,3%

MEWS / packing

formato size	pz-mq pcs-sqm	pz-scat. pcs-box	mq-scat. sqm-box	scat.-pal. box-pal.	kg-scat. kg-box	kg-pal. kg-pal.	mq-pal sqms-pal
5,5-39,4 chevron	46,15	36	0,78	40	18,25	730	31,20
5,5-19,6 chevron	92,76	72	0,78	40	18,25	730	31,20
5,5-45	40,40	36	0,89	40	20,83	833	35,60
11-11	82,64	60	0,73	48	17,08	820	35,04
gradone 33-45-4,5	-	2	0,9 ml	-	8,00	-	-
angolare 33-33-4,5	-	1	0,33 ml	-	6,10	-	-
battiscopa 3,8-45	-	10	4,5 ml	-	3,80	-	-
artisanal 3,2-20	156,25	104	0,67	64	13,80	883	42,88
quarter round 1,1-20	-	20	4,0 ml	-	1,00	-	-
quarter round corner 1,4-1,4	-	-	-	-	-	-	-

Industrial



V4
variazione forte
dramatic variation

Artisanal



V1
variazione uniforme
uniform variation

MUTINA.IT

Follow us on

